
# SPRINT

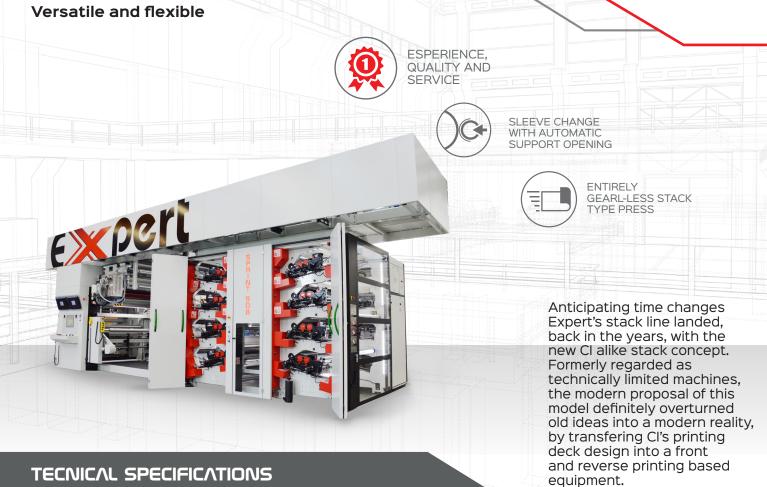

# TECNICAL SPECIFICATIONS

**Type 900** 

Number of colours: Printing width max. mm: Material width max. mm: Printing repeat mm: Printing speed up to: Trasmission type: Reel diameter Ø:

4 - 6 - 8 From 800 to 1600 From 800 to 1650 From 300 to 900 350 mt/' Gearless 800 - 1000 - 1200 - 1300 - 1500

# **Type HD 1200**

Number of colours: 4 – 6 – 8 Printing width max. mm: From 800 to 1600 Material width max. mm: From 800 to 1650 Formati stampa mm: From 320 to 1250 Printing speed up to: 350 mt/ Trasmission type: Gearless Reel diameter Ø: 800 - 1000 - 1200 - 1300 - 1500

## A-C System

A-C SYSTEM, Automatic equipment for ink (solvent or water based) circulation and cleaning on flexo printing units with closed chamber doctor blade inking.

### Inkflow-C14

The system is self-cleaning and doesn't need operator maintenance at the end of the job.

### **Racla Toolless**

"NO TOOL" system to change the blades and side seals in the machine without the use of tools.

The doctor blade system is mounted on sliding blocks in order to control the pressure on the anilox roller sleeve. The alignment and pressure set up of the blades against the anilox roller sleeve are obtained thru screws and a pneumatic system. The pressure regulation of the doctor blade onto the anilox roller can be made pneumatically and also mechanically, in order to avoid overpressure and therefore high consumption of the blades.

### Sleeve change with manual support opening

Sleeve change is very quickly, easily and completely tool-less. The clamping system of the mandrel, on the front side, is opened and closed manually for the sleeve change.